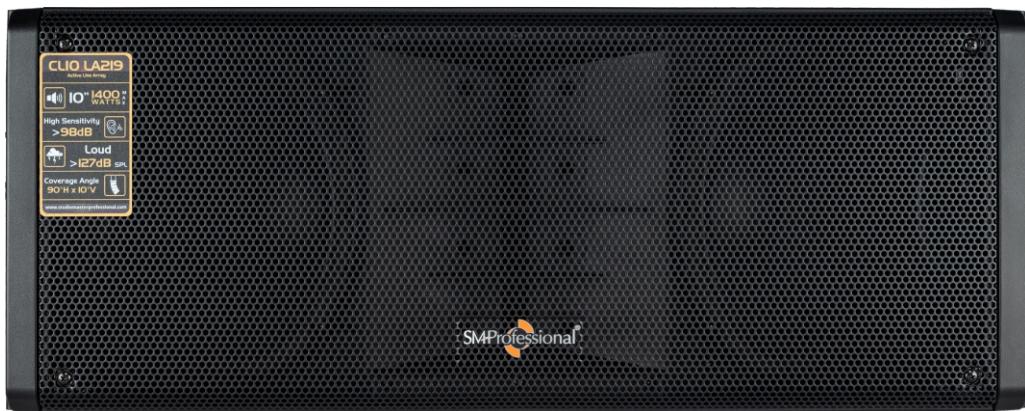


Clio LA 219

Dual 10" Active Line Array System



Overview

The Studiomaster Professional Clio LA219 is a high performance 700W (RMS) / 1400W (Peak) 2-way bi-amplified active line array system. Integrating 2 x 10" LF driver, class D amplification, easy DSP presets and more, the system is geared to deliver high SPL and a focused dispersion area.

Key Features



3 Easy DSP Presets

3

Small Venues*For upto 3
Ground Stacked
Array Modules*



4-8

Mid-Sized Venues*For upto 4-8
Ground Stacked Or
Flown Array Modules*


9-12

Large Venues*For upto 9-12
Ground Stacked Or
Flown Array Modules*

Easy Daisy Chaining

**Powercon***For AC Input &
AC Link Out***XLR***For Input Signal &
Link Out*

Quick & Easy Installation

**Fly Bar Kit****For Quick Rigging
and Flying**Available Separately**Integrated Locking***For Safe and
Secure Installation***Splay Angles***For Versatile
Array Configurations***Strong Plastic
Enclosure***Built For the
Long Haul***Tour Grade
Build***For Road-readiness
& Reliability*

All Features



- High performance 2-way bi-amplified active line array system.
- Driven by an efficient class D amplifier.
- Integrates powerful LF & HF drivers to deliver high SPL and a wide dispersion area.
- Easy DSP sound presets: Front Field / 4-8 / 9-12.
- Built-in soft clip limiter for speaker protection.
- Multifunctional combo XLR-Jack input connector.
- XLR link out for linking additional speakers.
- Powercon connectors for AC input and link out power supply.
- Durable plastic moulded enclosure.
- Ergonomically-shaped handles for easy transportation.

System Consists of:

- Clio LA219 Line array module
- Fly bar

Technical Specifications

Parameter	Specifications
System	Bi-Amp
Amplifier Type	Class D
Power Output - RMS / Peak (Watts)	700 / 1400
Frequency Response	60Hz-20kHz
System Maximum SPL (dB)	127
LF Driver Size	2 X 10" Ferrite LF, 3" Voice coil
HF Driver Size	1 X 1.4" Titanium HF Driver, 2" Voice Coil
Horizontal Coverage Angle	90°
Vertical Coverage Angle	10°
Crossover Frequency	2000Hz
Input Connectors	1 XLR-Jack
Output Connector (Line output)	Balanced XLR
Power supply	240V, 50Hz
Dimensions (W x D x H) mm	770 x 495 x 300
Net Weight Clio LA219 (Kg)	32.2
Net Weight Clio LA219 Fly Bar (Kg)	17

Dimensions



Support

For sales, support, pricing and availability:
Email: info@audioplus-india.com
Telephone: 022-42869000 / 001
WhatsApp: +91-8879028079
(Monday to Saturday between 10:00 a.m to 6:00 p.m.)
Contact Us:
<http://www.studiomasterprofessional.com/home/contact>



Scan QR Code for More Details



Scan QR Code to Watch Video

For after-sales service and support: Email: sales.support@audioplus-india.com Telephone: 022-42869010 / 49 / 57

Subscribe to our Channel



SCAN
REGISTER
& WIN



SUBSCRIBE
ON
YOUTUBE



FOLLOW US
ON
INSTAGRAM



VISIT
OUR
WEBSITE



SCAN
TO
WHATSAPP



* Product design and specifications are subject to change without notice.

Studiomaster Professional is a registered trademark of Audioplus in India. © Copyright Audioplus, 2008. All rights reserved. Any unauthorised reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

Code: Rev000 / SMP Clio LA219 Datasheet / Jan 2026