

Eos 24.6

24 Channel Mixing Console



Overview

The Studiomaster Professional EOS 24.6 is a large-format 24 channel live mixing console. Featuring 24 XLR inputs, 6 Aux sends, 4 subgroups, multiple music playback options, advanced routing and more, the mixing console is ideal for live, front-of-house, touring, and complex installation applications in large venues.

24

MIC INPUTS

- BALANCED 24 MIC / 28 LINE INPUTS
- 4 MON:STER (MONO-STEREO) INPUTS FOR FULL FLEXIBILITY
- 4-BAND EQ ON ALL INPUTS
- 75Hz LOW CUT ON MONO CHANNELS



4

SUB GROUPS WITH INDIVIDUAL OUTPUTS



2

MASTER OUTPUTS BAL. XLR & 1/4" JACK



6

AUX SENDS

- AUX 1-4 PRE/POST SWITCHABLE
- AUX 5-6 POST ONLY
- STEREO AUX RETURNS



7

BAND GEQ

- STEREO GRAPHIC EQUALIZERS
- ASSIGNABLE BETWEEN GROUP & MAIN



100

MM FADERS



ONE KNOB COMPRESSOR ON 8 INPUTS

- HIGHER EFFECTIVE GAIN
- REDUCE EQUIPMENT DAMAGE
- EVEN SIGNAL LEVELS
- MAKES LOUD SIGNAL SOFTER & SOFT SIGNALS LOUDER

DUAL MULTI-EFX PROCESSOR



MULTI-EFX DSP



HIGH RES. SAMPLING RATE



24 DSP PRESETS



EFX TO MON ROUTING

MULTIPLE MUSIC PLAYBACK OPTIONS

USB MULTIMEDIA PLAYER (Front Panel)



USB MP3 MEDIA
PLAYER & RECORDER

USB ^{mp3}
ENABLED

REC Bluetooth
Recording



BLUETOOTH 5.0

MOBILE MEDIA PLAYER (Ch. 12)



USB TYPE C MOBILE
MEDIA PLAYER CONNECTION



USB AUDIO INTERFACE (Rear Panel)



BUILT-IN USB
AUDIO INTERFACE



PLAYBACK
RECORDING

STEREO PLAYBACK
& RECORDING

PLUG
& PLAY


FULLY CLASS
COMPLIANT

METERING, MONITORING & PHANTOM POWER

2 x Dual 10 -segment
LED Meters

Advanced Meter
Routing

1/4" Headphone &
Monitor Output with
Level Control

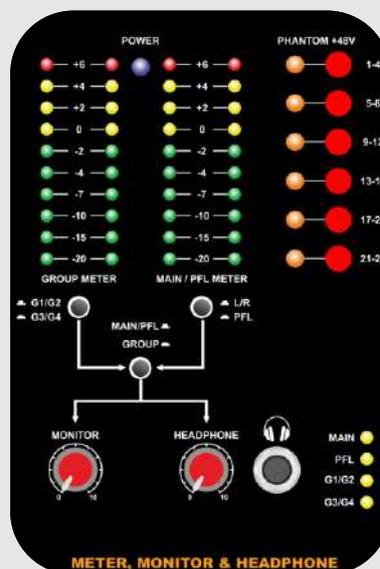

6 Phantom Power
Split Groups

Added Control &
Flexibility For
Phantom Power
Supply

All Features



- 24 Channels: 24 Mic / 28 Line Inputs.
- MON:STER (Mono-Stereo) Inputs for Full Flexibility
- Ultra Low-Noise Preamps With Wide Headroom and Dynamic Range.
- 75Hz low cut on mono channels.
- 4-Band EQ on all Inputs.
- 6 Aux Sends – 4 Pre/Post and 2 Post.
- 4 Sub Groups with Individual 1/4" Outputs.
- Insert (Send/Return) On the First 8 Mono Channels and Main Output.
- Split Global Switched +48V Phantom Power Supply (6 Groups of 4 Channels Each).
- Responsive Large 100mm Faders for Easy Mixing.
- One Knob Compressor on Channels 1-8.
- Dual Multi-EFX Processor with 24 DSP Presets And Editable Parameters.
- Provisions to Route EFX to Monitor via 4 Aux Buses.
- USB Audio Interface with Plug & Play Connectivity for RECORDING and Playback using a PC.
- USB Type C Mobile Media Player and Audio Interface
- USB MP3 Media Player & RECORDER with Bluetooth.
- Level Control, 2-band EQ with Internal/External Media Input Selection.
- Stereo AUX Returns.
- Balanced XLR and 1/4" Jack Main Outputs.
- Mute, Solo, Group and Main (L-R) routing per Channel.
- Illuminated Mute & PFL (Solo) Switches.
- Additional Talkback Microphone Input.
- Stereo RCA Input and Record Output.
- Headphone Output with Level Control.
- 7-Band Stereo Graphic Equalizers.
- Dual Assignable 10-Segment LED Meters.
- Ergonomically Angled Design for Better Visibility.
- Clutter-free Rear Panel Input and Output Connectivity.

Technical Specifications

Parameter	Specifications
Nominal Gain (Mic / Line / Stereo Line)	60dB / 40dB / 20dB
Max Gain (Mic / Line / Stereo Line)	80dB / 60dB / 40dB

Input Output Levels

Mic (Gain Min / Gain Max)	-10dBu / -60dBu
Line (Gain Min / Gain Max)	+10dBu / -40dBu
Stereo Line (Gain Min / Gain Max)	+10dBu / -20dBu
Aux Return (Nominal / Max)	-10dBu / +30dBu

Output Levels

Main Output (Nominal / Max)	0dBu (0.775V RMS) / +20dBu (7.75V RMS) Max
Insert In/Out (Nominal / Max)	0dBu (0.775V RMS) / +20dBu (7.75V RMS) Max

General

Mic Input Impedance	5 K Ω Balanced
Line Input Impedance	20K Ω Balanced / 10K Ω Unbalanced
Frequency Response	20Hz-20kHz (+0 / -1dB)
Total Harmonic Distortion	< 0.02%
MIC EIN (Equivalent Input Noise)	-128dB
Main Out/Group Out	-80dB

Equalisation

Mono MIC (Hi / Hi-Mid / Low-Mid / Low)	± 15 dB @ 12kHz / 2.5kHz / 400Hz / 80Hz
Stereo Line (Hi / Hi-Mid / Low-Mid / Low)	± 15 dB @ 12kHz / 2.5kHz / 400Hz / 80Hz
Dimensions (W x D x H) mm	940 x 540 x 170
Net Weight (Kg)	14

Dimensions



Support

For sales, support, pricing and availability:
 Email: info@audioplus-india.com
 Telephone: 022-42869000 / 001
 WhatsApp: +91-8879028079
 (Monday to Saturday between 10:00 a.m to 6:00 p.m.)
 Contact Us:
<http://www.studiomasterprofessional.com/home/contact>



Scan QR Code for More Details



Scan QR Code to Watch Video

For after-sales service and support: Email: sales.support@audioplus-india.com Telephone: 022-42869010 / 49 / 57

Subscribe to our Channel

Stu**diomaster**[®]
PROFESSIONAL



SM**Professional**[®]

On

YouTube



SCAN
REGISTER
& WIN



SUBSCRIBE
ON
YOUTUBE



FOLLOW US
ON
INSTAGRAM



VISIT
OUR
WEBSITE



SCAN
TO
WHATSAPP



* Product design and specifications are subject to change without notice.

Stu**diomaster** Professional is a registered trademark of Audioplus in India. © Copyright Audioplus, 2008. All rights reserved. Any unauthorised reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

Code: Rev000 / SMP Eos 24.6 Datasheet / Mar 2026

Brought to you by:



A1/A2, Giriraj Indl. Est., Mahakali Caves Road, Andheri (E), Mumbai - 400 093, India Tel.: +91-22-4286 9000/001 W: www.audioplus-india.com