

DJA 4000

Professional Stereo Power Amplifier




Overview

The DJA series is our range of high-performance and cost-effective power amplifiers designed to deliver clean, dynamic power with the legendary Studiomaster Professional sound quality and reliability that professionals depend on.



Key Features

• Built-In Crossover



SUB WOOFER


This is a low-pass filter. The amplifier reproduces frequencies that are lower than the cut-off set by the frequency adjustment knob.



LOW CUT

This is a high-pass filter. You can use this setting to filter out unneeded low or subsonic frequencies.

• Bass Boost Switch

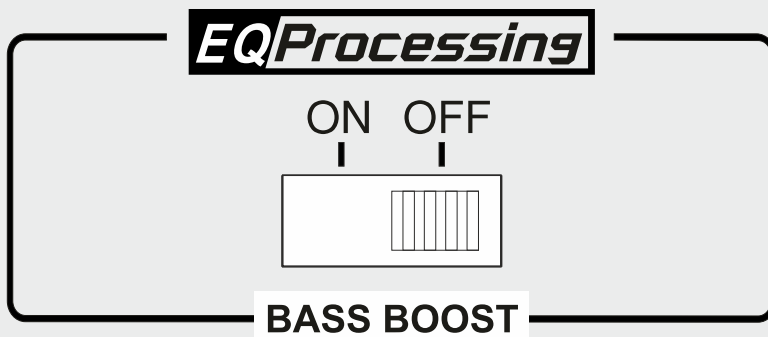


When you activate this mode, the amplifier adds low-frequency compensation to enhance the speaker's bass output

Note: This switch is only effective when the FILTER switch is in the OFF position.

• LED indicators on front panel for Power, Signal, Clip, Bass Boost and Protect.



All Features

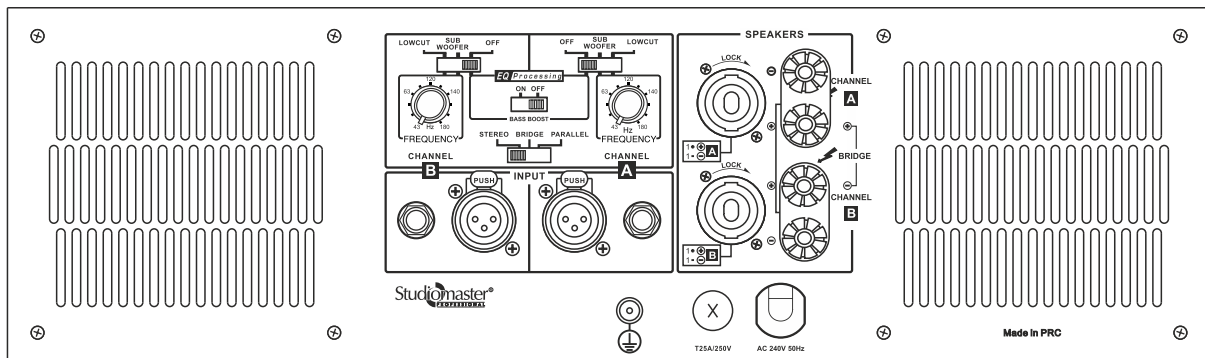


- Rugged and reliable professional stereo power amplifier.
- High-current toroidal transformers with high-endurance cores for superior transient response.
- Ultra-functional EQ Processing, Low Cut, and Subwoofer with crossover selection options.
- 3 switchable operational modes: stereo, parallel, and bridge.
- Intelligent cooling and heat dissipation using large low-noise variable speed fans.
- LED indicators on the front panel for power, signal, clip, bass boost and protect modes.
- Mains voltage operation 240V AC as well as low voltage operation at 150V AC.
- Audio-grade balanced XLR and 1/4" jack input connectors.

Technical Specifications

Parameter	Specifications
Stereo Mode Power Output	
4 Ω (True RMS), 20Hz-20kHz, 1% THD	2 x 1400 W
4 Ω (EIA), 1kHz, 1%THD	2 x 1950 W
8 Ω (True RMS), 20Hz-20kHz, 1% THD	2 x 900 W
8 Ω (EIA), 1kHz, 1% THD	2 x 1100 W
Bridged Mode Power Output	
8 Ω (True RMS), 20Hz-20kHz, 1% THD	2 x 2800 W
8 Ω (EIA), 1kHz, 1% THD	2 x 3900 W
Damping Factor (8 Ω)	>350:1
Frequency Response	20Hz-20kHz (±0.5dB)
Protection	Temperature, DC, Short Circuit, and Soft-Start
Input Connector (Per Channel)	XLR and ¼" TRS Jack
Output Connector (Per Channel)	Speakon and Binding Posts
Dimensions (W x D x H) mm	482 x 495 x 132 (2U)
Net Weight (Kg)	30

Note: BIS registration is Mandatory for all amplifiers with input power above 2000W.

Dimensions

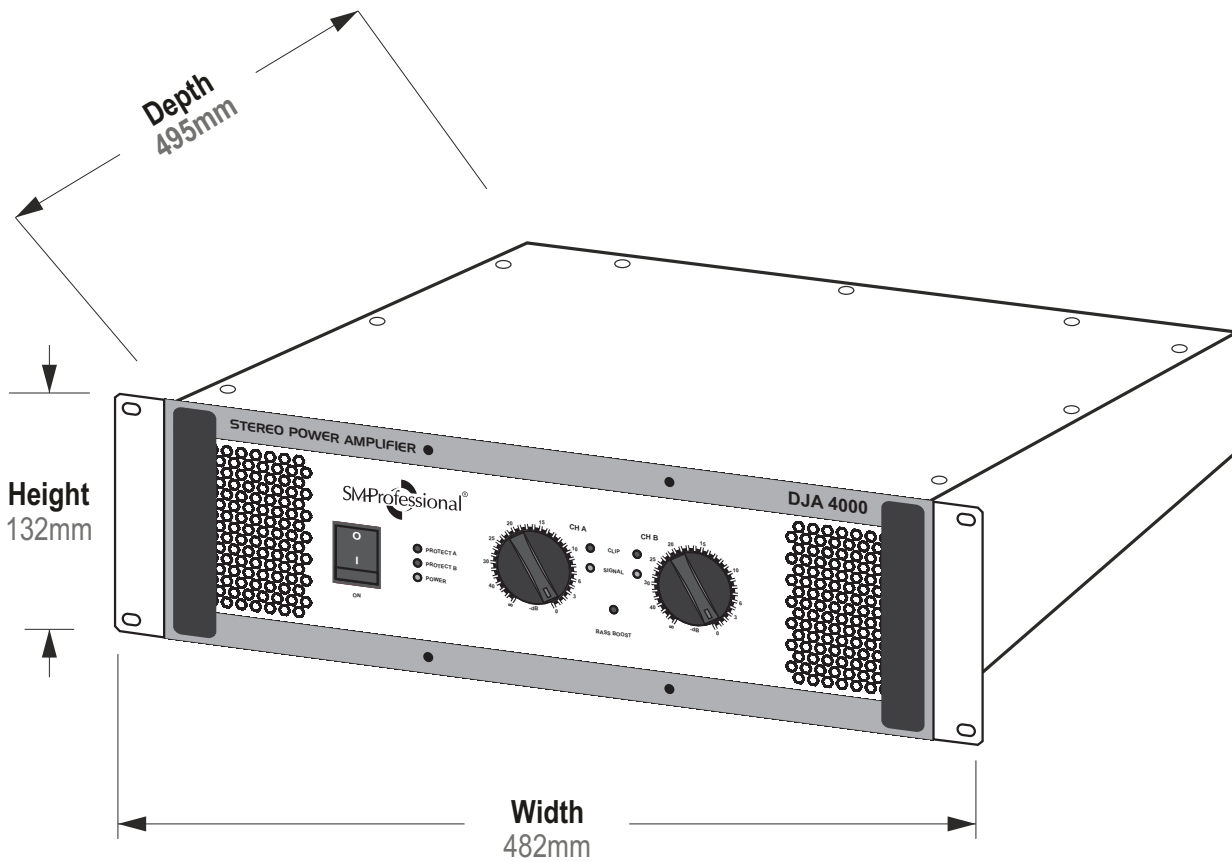

Support

For sales, support, pricing and availability:
 Email: info@audioplus-india.com
 Telephone: 022-42869000 / 001
 WhatsApp: +91-8879028079
 (Monday to Saturday between 10:00 a.m to 6:00 p.m.)
 Contact Us:
<http://www.studiomasterprofessional.com/home/contact>



Scan QR Code for More Details



Scan QR Code to Watch Video

For after-sales service and support: Email: sales.support@audioplus-india.com Telephone: 022-42869010 / 49 / 57

Subscribe to our Channel

Studiomaster[®]
PROFESSIONAL

On



SCAN
REGISTER
& WIN



SUBSCRIBE
ON
YOUTUBE



FOLLOW US
ON
INSTAGRAM



VISIT
OUR
WEBSITE



* Product design and specifications are subject to change without notice.

Studiomaster Professional is a registered trademark of Audioplus in India. © Copyright Audioplus, 2008. All rights reserved. Any unauthorised reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

Code: Rev001 / SMP DJA 4000 Datasheet / June 2022

Brought to you by:



A1/A2, Giriraj Indl. Est., Mahakali Caves Road, Andheri (E), Mumbai - 400 093, India Tel.: +91-22-4286 9000/ 001 W: www.audioplus-india.com