

## AQUA 6

Compact Mixing Consoles




### Overview

The Aqua series is our a range of feature-packed yet compact mixing consoles with multiple routing options, 24-bit multi-EFX processor, and a 7-band stereo graphic equaliser ideal for a variety of touring and install applications.

## Key Features

- 7-band stereo Graphic Equalizer.

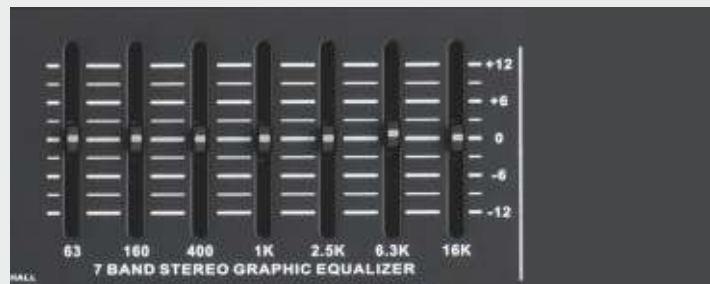

- Built-in 24-bit multi-FX processor with Tap Tempo.



## All Features



- 4 mic/line + 2 stereo inputs.
- 2 Aux Sends - Aux + EFX (when internal EFX is unused).
- 2 Sub groups with individual outputs.
- Globally switched +48V phantom power.
- 3-band EQ per channel.
- Mic/Line selectivity switch on each mono channel with -20dB attenuation pad for mic input.
- Mix, Group and PFL routing per channel.
- L/R pan control and signal LED per channel.
- Headphone and monitor outputs with level control.
- Stereo RCA playback and record outputs.
- FS mute jack to connect to a standard footswitch to switch the internal EFX On/Off.
- Balanced XLR group and main outputs.

## Technical Specifications

Parameter	Specifications
Nominal Gain (Mic / Line / Stereo Line)	60dB / 40dB / 20dB
Max Gain (Mic / Line / Stereo Line)	80dB / 60dB / 40dB

### Input Levels Sensitivity

Mic (Gain Min / Gain Max)	-10dBu / -60dBu
Line (Gain Min / Gain Max)	+10dBu / -40dBu
Stereo Line (Gain Min / Gain Max)	+10dBu / -20dBu

### Input Impedance

Mic Input	2K Balanced
Line Input	20K (Balanced) / 10K (Unbalanced)
Main Output Level (Nominal / Max)	0dBu (0.775V RMS) / +22dBu (10V RMS)
Main Output Impedance	75
Frequency Response	20Hz-20kHz (+0/-2dB)
Total Harmonic Distortion	< 0.006%
Signal to Noise Ratio	85dB
Equalisation (Mic / Stereo Line)	±15dB (12kHz HF / 2.5kHz MF / 60Hz LF) / ±15dB (12kHz HF / 2.5kHz MF / 80Hz LF)
Effect	16 Effects, 24-bit EFX Processor
Phantom Supply	+48V
Dimensions (W x D x H) mm	322 x 317 x 134
Net Weight (Kg)	4.5

## Dimensions



## Support

For sales, support, pricing and availability:  
Email: [info@audioplus-india.com](mailto:info@audioplus-india.com)  
Telephone: 022-42869000 / 001  
WhatsApp: +91-8879028079  
(Monday to Saturday between 10:00 a.m to 6:00 p.m.)  
Contact Us:  
<http://www.studiomasterprofessional.com/home/contact>



Scan QR Code for More Details



Scan QR Code to Watch Video

For after-sales service and support: Email: [sales.support@audioplus-india.com](mailto:sales.support@audioplus-india.com) Telephone: 022-42869010 / 49 / 57

## Subscribe to our Channel

Studiomaster<sup>®</sup>  
PROFESSIONAL

On

YouTube



SCAN  
REGISTER  
& WIN



SUBSCRIBE  
ON  
YOUTUBE



FOLLOW US  
ON  
INSTAGRAM



VISIT  
OUR  
WEBSITE



\* Product design and specifications are subject to change without notice.

Studiomaster Professional is a registered trademark of Audioplus in India. © Copyright Audioplus, 2008. All rights reserved. Any unauthorised reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

Code: Rev001 / SMP AQUA 6 Datasheet / June 2022

Brought to you by:

**AUDIOPLUS**

A1/A2, Giriraj Indl. Est., Mahakali Caves Road, Andheri (E), Mumbai - 400 093. India Tel.: +91-22-4286 9000/ 001 W: [www.audioplus-india.com](http://www.audioplus-india.com)